


ROBA[®]-Co-Pro[®]

Compact and high-performance device
Modern construction overload protection

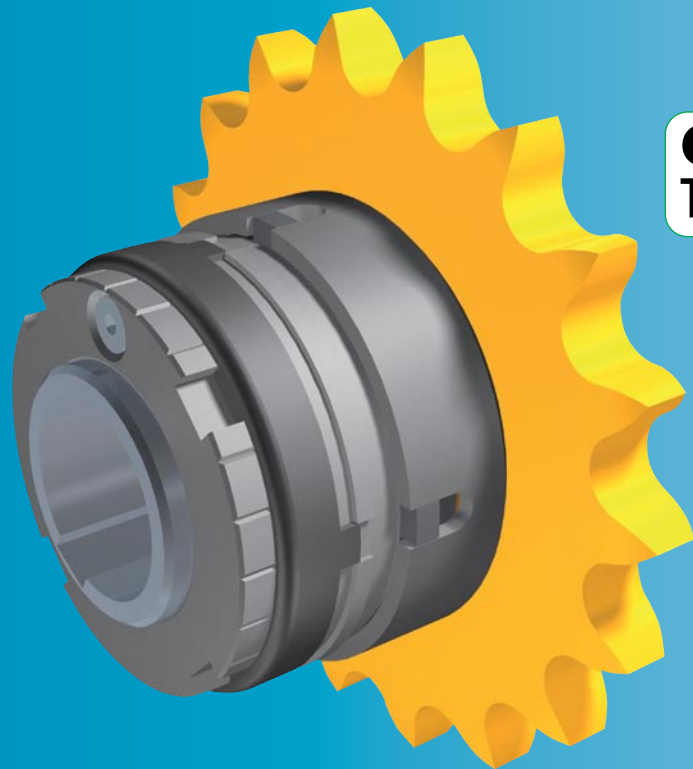

- *Large shaft diameters*
- *Extremely high torques*
- *Small outer dimensions*

www.mayr.de

P.1000.V03.GB

mayr[®]
your reliable partner

ROBA®-Co-Pro®

*small torque limiting clutch
for great constructions*

ROBA®-Co-Pro®

**35 % savings on
installation space and
axis-centre distance ***

* Chain drive with ratio: 1:2,
overload torque: 400 Nm
and shaft diameter: 30 mm

Application advantages

- minimum installation space requirements
- no machine downtimes, no expensive repairs
- compact, cost-effective machine construction
- high dynamics in the drive system due to low weight and low mass moments of inertia
- saves costs due to small drive components (e. g. sprocket wheels and chains)
- functionally reliable due to ultra-strong bearing bushings and high-strength friction linings
- simple and fast friction lining replacement



6 : 1		ROBA®-Co-Pro®	6
the clear winner in performance comparisons			5
	Quality clutch		4
			3
			2
Normal clutch			1

Up to 6 times higher performance density (Nm/cm³) than other load-holding torque limiting clutches.





ROBA®-Co-Pro®

- saves energy and raw materials: up to 65 % savings on material.
- saves drive energy: up to 80 % less mass moment of inertia.

Design M
Type 1000._1000

Design L
Type 1010._1000

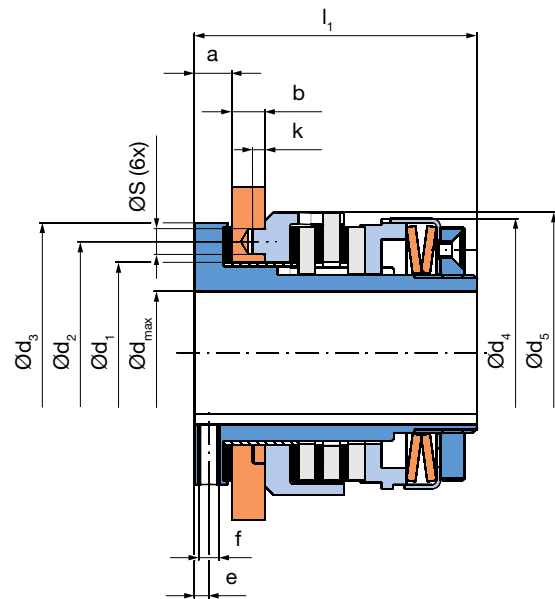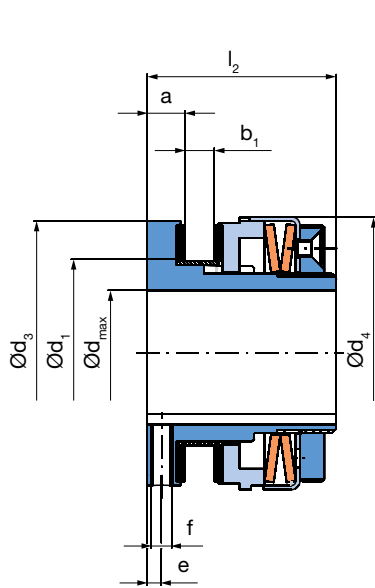

Size	Limit torque for overload				Weight		Pilot bore Ød [mm]
	Type M		Type L		1000.- [kg]	1010.- [kg]	
	1000.11000 [Nm]	1000.21000 [Nm]	1010.11000 [Nm]	1010.21000 [Nm]			
30	50 – 100	100 – 200	100 – 200	200 – 400	0,6	1,4	15
40	100 – 200	200 – 400	200 – 400	400 – 800	1,5	2,3	20
50	200 – 400	400 – 800	400 – 800	800 – 1600	2,8	4,3	25

Size	Ø d _{max}	Ø d ₁	Ø d ₂	Ø d ₃	Ø d ₄	Ø d ₅	a	b _{min}	b _{max}	b _{1 min}	b _{1 max}
30	30 ^{H7 1)}	44	54	63	65	68	9	8	16	7	11
40	40	64	75	85	87	90	11	8	16	15	19
50	50	80	94	108	110	113	13	12	20	19	25

Size	e	f	l ₁	l ₂	k	Ø S
30	3,5	M5	68	45	3	6
40	3,5	M5	80	60	3	6
50	5	M6	95	75	3	10

Order Number

—	/	1	0	—	0	.	—	1	0	0	0	/	—
▲				▲			▲						▲
Size 30 40 50		Design M Design L	0 1		1 2	low torque range high torque range							Drive element width in mm

Example: 30 / 1010.21000 / 10

¹⁾ Keyway according to DIN 6885 / 3

Headquarters

Chr. Mayr GmbH + Co. KG
Eichenstrasse 1, D-87665 Mauerstetten
Tel.: 0 83 41/8 04-0, Fax: 0 83 41/80 44 21
www.mayr.de, E-Mail: info@mayr.de



mayr[®]

Service Germany

Baden-Württemberg

Esslinger Straße 7
70771 Leinfelden-Echterdingen
Tel.: 07 11/45 96 01 0
Fax: 07 11/45 96 01 10

Bavaria

Eichenstrasse 1
87665 Mauerstetten
Tel.: 0 83 41/80 41 04
Fax: 0 83 41/80 44 23

Chemnitz

Bornaer Straße 205
09114 Chemnitz
Tel.: 03 71/4 74 18 96
Fax: 03 71/4 74 18 95

Franken

Unterer Markt 9
91217 Hersbruck
Tel.: 0 91 51/81 48 64
Fax: 0 91 51/81 62 45

Hagen

Im Langenstück 6
58093 Hagen
Tel.: 0 23 31/78 03 0
Fax: 0 23 31/78 03 25

Kamen

Lünener Strasse 211
59174 Kamen
Tel.: 0 23 07/23 63 85
Fax: 0 23 07/24 26 74

North

Schiefer Brink 8
32699 Extertal
Tel.: 0 57 54/9 20 77
Fax: 0 57 54/9 20 78

Rhine-Main

Jägerstrasse 4
64739 Höchst
Tel.: 0 61 63/48 88
Fax: 0 61 63/46 47

Branch office

China

Mayr Zhangjiagang
Power Transmission Co., Ltd.
Changxing Road No. 16,
215600 Zhangjiagang
Tel.: 05 12/58 91-75 65
Fax: 05 12/58 91-75 66
info@mayr-ptc.cn

Great Britain

Mayr Transmissions Ltd.
Valley Road, Business Park
Keighley, BD21 4LZ
West Yorkshire
Tel.: 0 15 35/66 39 00
Fax: 0 15 35/66 32 61
sales@mayr.co.uk

France

Mayr France S.A.
Z.A.L. du Minopole
BP 16
62160 Bully-Les-Mines
Tel.: 03.21.72.91.91
Fax: 03.21.29.71.77
contact@mayr.fr

Italy

Mayr Italia S.r.l.
Viale Veneto, 3
35020 Saonara (PD)
Tel.: 0 49/8 79 10 20
Fax: 0 49/8 79 10 22
info@mayr-italia.it

Singapore

Mayr Transmission (S) PTE Ltd.
No. 8 Boon Lay Way Unit 03-06,
TradeHub 21
Singapore 609964
Tel.: 00 65/65 60 12 30
Fax: 00 65/65 60 10 00
info@mayr.com.sg

Switzerland

Mayr Kupplungen AG
Tobeläckerstrasse 11
8212 Neuhausen am Rheinfall
Tel.: 0 52/6 74 08 70
Fax: 0 52/6 74 08 75
info@mayr.ch

USA

Mayr Corporation
4 North Street
Waldwick
NJ 07463
Tel.: 2 01/4 45-72 10
Fax: 2 01/4 45-80 19
info@mayrcorp.com

Representatives

Australia

Transmission Australia Pty. Ltd.
22 Corporate Ave,
3178 Rowville, Victoria
Australien
Tel.: 0 39/7 55 44 44
Fax: 0 39/7 55 44 11
info@transaus.com.au

China

Mayr Shanghai
Representative Office
Room 506, No. 1007,
Zhongshan South No. 2 Road
200030 Shanghai, VR China
Tel.: 0 21/64 57 39 52
Fax: 0 21/64 57 56 21
sales@mayr.com.cn

India

National Engineering
Company (NENCO)
J-225, M.I.D.C.
Bhosari Pune 411026
Tel.: 0 20/27 47 45 29
Fax: 0 20/27 47 02 29
nenco@nenco.org

Japan

MATSUI Corporation
2-4-7 Azabudai
Minato-ku
Tokyo 106-8641
Tel.: 03/35 86-41 41
Fax: 03/32 24 24 10
k.goto@matsui-corp.co.jp

South Africa

Torque Transfer
Private Bag 9
Elandsfontein 1406
Tel.: 0 11/3 45 80 00
Fax: 0 11/9 74 05 24
torque@bearings.co.za

South Korea

Mayr Korea Co. Ltd.
no. 302, 3rd floor, Kyoungnam
Taxi Mutual Aid Association Hall,
209-3, Myoung-Seo Dong,
Changwon, Korea
Tel.: 0 55/2 62-40 24
Fax: 0 55/2 62-40 25
info@mayrkorea.com

Taiwan

German Tech Auto Co., Ltd.
No. 162, Hsin sheng Road,
Taishan Hsiang,
Taipei County 243, Taiwan R.O.C.
Tel.: 02/29 03 09 39
Fax: 02/29 03 06 36
steve@zfgta.com.tw

Machine tools

Applications in China
Dynamic Power Transmission Co., Ltd.
Block 5th, No. 1699, Songze Road,
Xujing Industrial Zone
201702 Shanghai, China
Tel.: 021/59883978
Fax: 021/59883979
dpcshanghai@online.sh.cn

More representatives:

Austria, Benelux States, Brazil, Canada, Czech Republic, Denmark, Finland, Greece, Hongkong, Hungary, Indonesia, Israel, Malaysia, New Zealand, Norway, Philippines, Poland, Romania, Russia, Slovakia, Slovenia, Spain, Sweden, Thailand, Turkey

You can find the complete address for the representative responsible for your area under www.mayr.de in the internet.

mayr[®]
your reliable partner